


FLUID BED DRYER "FBD"

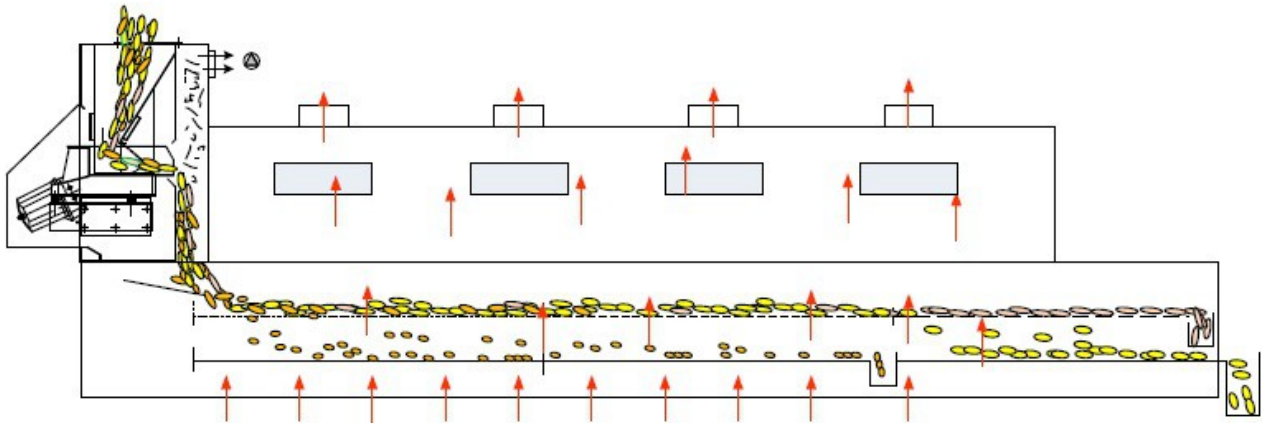

BASIC CONSTRUCTION:

- Built in normal steel with screen section of laminated wood.
- Parts in contact with material covered with stainless steel.
- Vibrator feeder (A7+B5) with potentiometer for capacity regulation.
- Aspiration hood in full length of the screen section with inspection windows on both sides.
- Total drying/screen length is 4 x 1500 mm = 6000 mm.
- The first 4500 mm of the screen area is for drying, sifting, and dusting.
- The last 1500 mm of the screen area is for removal of clumps and double seeds.
- One set of screen segments with standard perforations above 2 mm.
- Rubber ball cleaning for all screens.
- Speed drive and motor.

TECHNICAL DATA:		FBD-1500
Motor, screen section	kW	2.2
Number of screen segments	pcs	3 + 1
Screen size	L=1000 mm x W=mm	1500
Screen area	m ²	6
Weight	kg	2400